

Photonic & Fiber Alignment Engines

NANOSCALE ACCURACY, MILLISECOND RESPONSIVENESS,
ULTRA-FAST GLOBAL OPTIMIZATION, REAL-TIME TRACKING, 3 TO 18 OR MORE AXES

All-in-One Host Software

Comprehensive, Cross-Platform Rapid Application Development Tool-Kits



Software emulation allows application programs to be developed and pretested without having all components on site. Simulation tools also avoid collisions e.g., to prevent the moving platform from approaching positions where the platform or the mounted load would collide with the surroundings. The free choice of the pivot point and coordinate systems for definition of work- and tool-space can be done by a simple software command to enable scanning in inclined planes. Mobile apps allow wireless monitoring and control.

User-friendly application development libraries and sample applications for easy, fast, and flexible implementation

- Libraries for C++, C#, VB.net, etc.
- Python
- LabVIEW
- MatLab

Available for Windows, Linux and OS X deployment. Universal Command Set (GCS) simplifies commissioning and programming. Supports PI controllers' built-in, ultrafast, and vibration-free scan/align algorithms.


PIMikroMove® GUI for Windows provides quick access to motion and scanning across all PI products regardless of drive technology, controller type, number of axes etc. Includes software-based scan and align routines which work with all PI motion controllers.

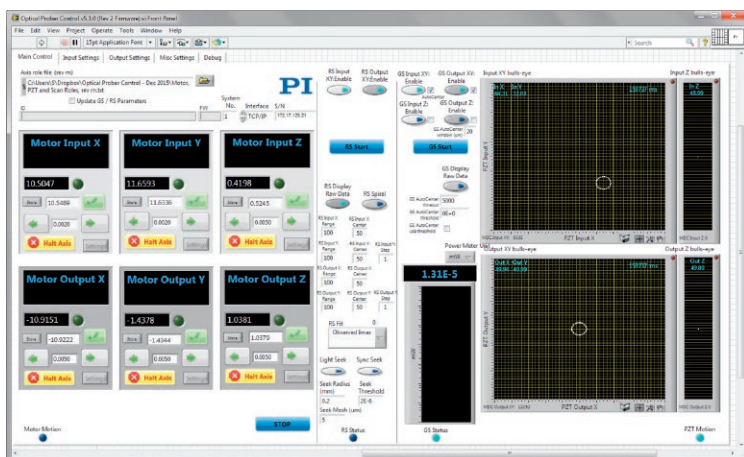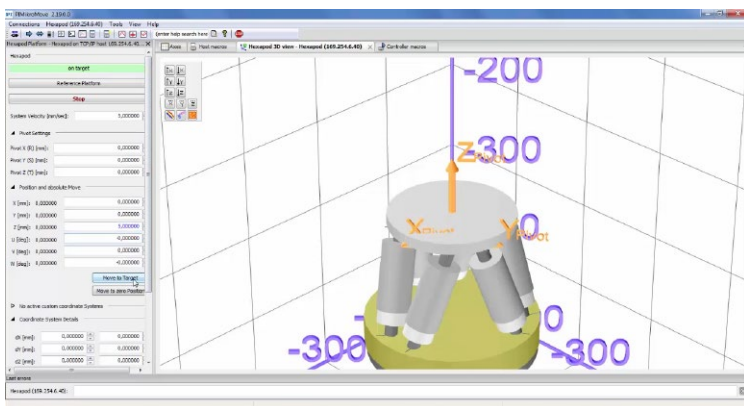

An example real-time system-control GUI built on PI's software libraries

Real-Time Fiber Alignment


Double-Sided, Real-Time Fiber Alignment for Planar Test, Packaging, Characterization

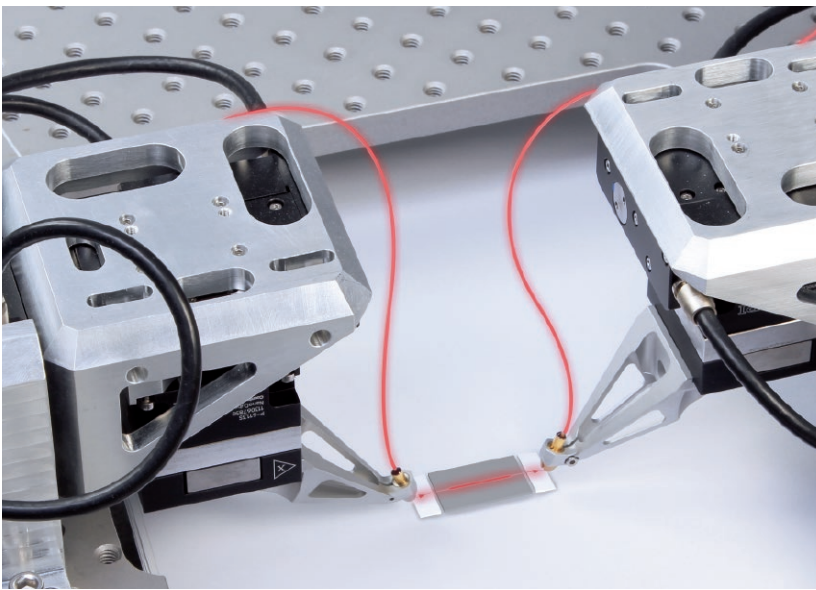

- Fast areal scans for characterization and localization, typ. < 0.5 sec
- Simultaneous, global optimization across multiple couplings and degrees of freedom (e.g., XY + Z on both sides of a waveguide in one shot, typ. < 1-2 sec)
- Digital control for throughput and device safety
- Broad supporting software toolkit for rapid development on virtually any platform


Ultra-precision parallel-kinematic hexapod microrobots offer significant advantages vs. conventional multi-axis stacks:

- Six degrees of freedom
- Cast the rotational centerpoint anywhere (e.g., a focal point, or a waveguide axis)
- User-definable coordinate systems
- Transverse and angular alignment optimization
- No moving cables

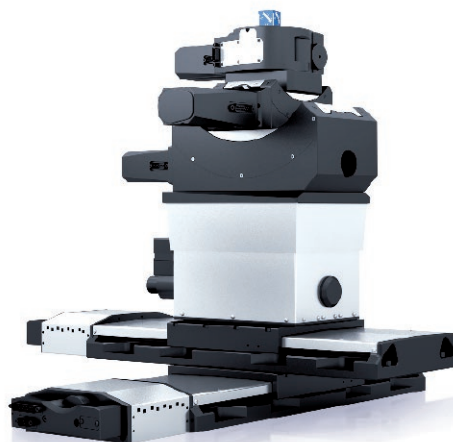


Broad, Versatile Portfolio


Comprehensive Software Toolkits for Rapid Application Development Across Windows, Linux & OS X

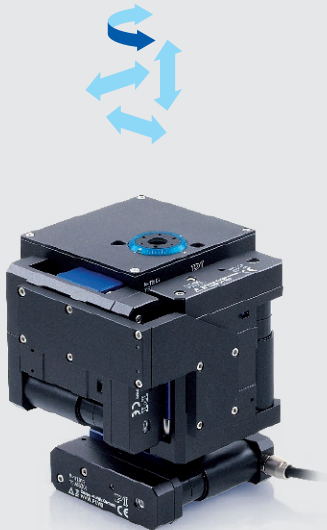

F-131: 3 linear axes, 50 nm step size, to 25 mm travel per axis, plus 1 rotary axis optional.

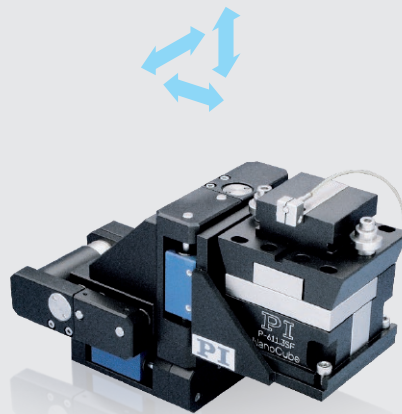

F-131: Modular, compact coarse/fine XYZ alignment stack. High-speed, piezo-based scanning and alignment algorithms. Control via F-712 with integrated firmware real-time alignment algorithms, or via modular PI controllers with software alignment modules.

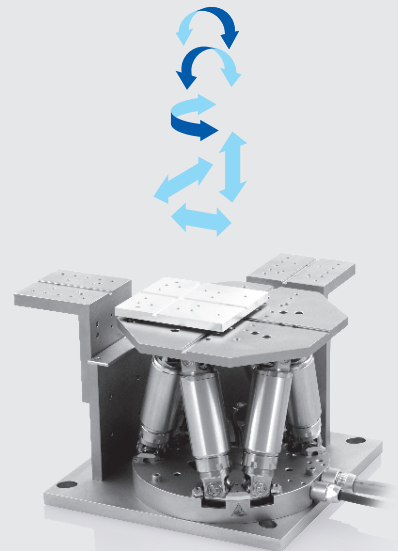

Alignment hexapods:
Broad family of solutions


H-811: 6-DOF, automated alignment and scanning, 10 nm resolution, 5 kg load capability, 34 mm / 42° travel.



Higher resolution




More degrees of freedom

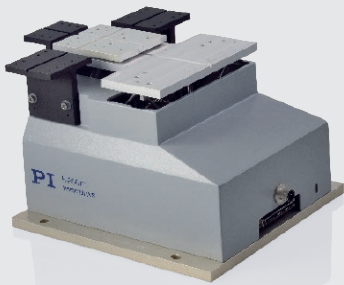


H-206: 6-DOF, 0.1 μm / 0.1 mdeg resolution, built-in alignment algorithms. One- or two-sided alignment. Long travel (up to 15 mm / 13 degrees).

Higher resolution

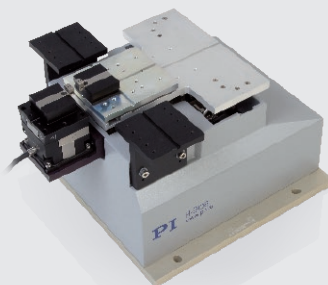

Built-in firmware alignment and deep, cross-platform software development toolkit. One motion controller solution for up to two additional axes or piezo-based 3-axis scanning system for 2 nm resolution and multi-channel global optimization/tracking.

Faster throughput

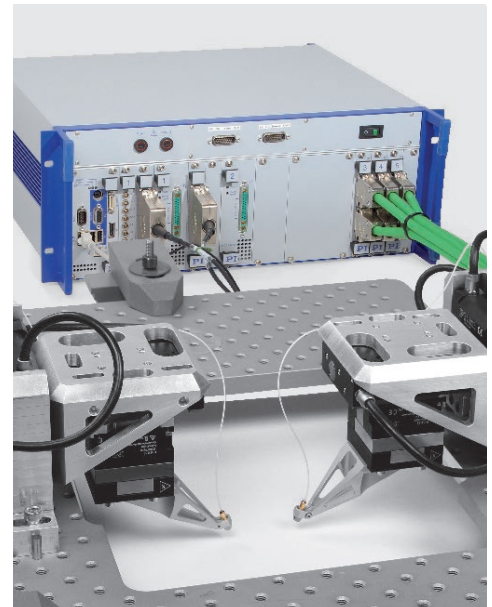

F-712: FAB-proven, ultrafast N- and NxM-axis alignment for multiple interacting couplings (as in multi-channel SiP devices). Real-time simultaneous optimization and tracking is built in. Integrated coarse/fine control; 2 nm resolution.



Headquarters

GERMANY

**Physik Instrumente (PI)
GmbH & Co. KG**
Auf der Roemerstrasse 1
76228 Karlsruhe
Phone +49 721 4846-0
Fax +49 721 4846-1019
info@pi.ws
www.pi.ws

PI miCos GmbH
Freiburger Strasse 30
Eschbach
Phone +49 7634 5057-0
Fax +49 7634 5057-99
info@pimicos.com
www.pi.ws

PI Ceramic GmbH
Lindenstrasse
Lederhose
Phone +49 36604 882-0
Fax +49 36604 882-4109
info@piceramic.com
www.piceramic.com

© Physik Instrumente (PI) GmbH & Co. KG

All contents, including texts, graphics, data etc., as well as their layout, are subject to copyright and other protective laws. Any copying, modification or redistribution in whole or in parts is subject to a written permission of PI.

Although the information in this document has been compiled with the greatest care, errors cannot be ruled out completely. Therefore, we cannot guarantee for the information being complete, correct and up to date. Illustrations may differ from the original and are not binding. PI reserves the right to supplement or change the information provided without prior notice.

Subsidiaries

USA (East) & CANADA

PI (Physik Instrumente) L.P.
Auburn, MA 01501
www.pi-usa.us

USA (San Francisco Bay Area Office)

PI (Physik Instrumente) L.P.
Sausalito, CA 94965
www.pi-usa.us

ITALY

Physik Instrumente (PI) S. r. l.
Bresso
www.pionline.it

FRANCE FRANCE

PI France SAS
Aix-en-Provence
www.pi.ws

JAPAN

PI Japan Co., Ltd.
Tokyo
www.pi-japan.jp

CHINA

**Physik Instrumente
(PI Shanghai) Co., Ltd.**
Shanghai
www.pi-china.cn

SOUTHEAST ASIA

**PI (Physik Instrumente)
Singapore LLP**
Singapore
www.pi-singapore.sg
For ID / MY / PH / SG / TH / VNM

KOREA

PI Korea Ltd.
Seoul
www.pikorea.co.kr

USA (West) & MEXIKO

PI (Physik Instrumente) L.P.
Irvine, CA 92620
www.pi-usa.us

UK & IRELAND

PI (Physik Instrumente) Ltd.
Cranfield, Bedford
www.physikinstrumente.co.uk

NETHERLANDS

PI Benelux B.V.
Sint-Oedenrode
www.pi.ws

SPAIN

Micos Iberia S.L.
Vilanova i la Geltrú
www.pimicos.es

TAIWAN

PI Japan Co., Ltd.
Osaka
www.pi-japan.jp

**Physik Instrumente
(PI Shanghai) Co., Ltd.**
Peking
www.pi-china.cn

**Physik Instrumente (PI)
Taiwan Ltd.**
Taipeh
www.pi-taiwan.com.tw